


## “Dry-Running Self-Adjusting” Packing for Rotary Services

### #8093-DSA

#8093-DSA is designed for service in clean media, such as condensate, boiler feed water, light paper stock, white water, and feedwater. #8094-DSA is for more abrasive services. Some of their features include:

- eliminating flush water
- drastically reduce leakage
- no equipment modification needed
- reduce equipment wear and maintenance
- compatible throughout a wide range of chemicals

The 8093-DSA set consists of a gasket spacer (#3530 or #9900), braided rings (#1333-G, #98, #5000, or #8921-K), and low-density and high-density GRAPH-LOCK® die-formed rings.

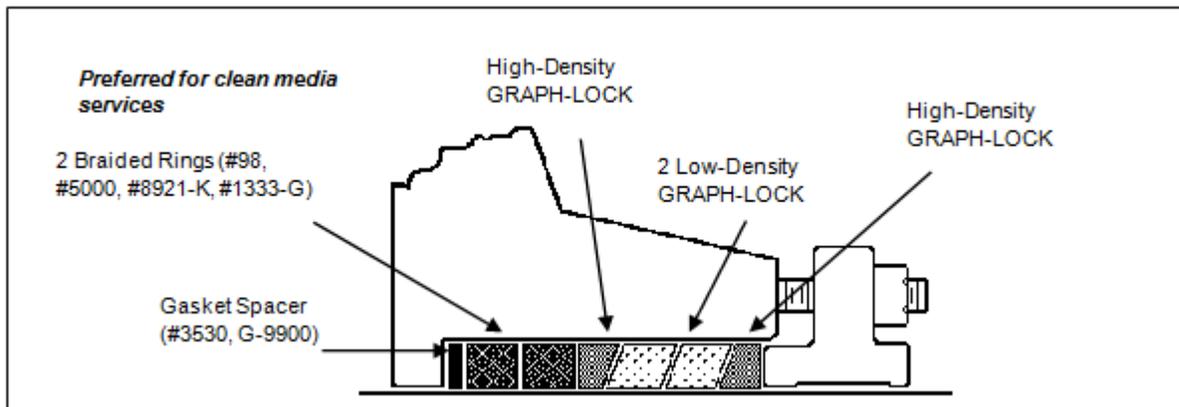

<b>TEMPERATURE:</b>	-170°F to +550°F (-110°C to +288°C)
<b>PH RANGE:</b>	0 - 14
<b>SHAFT SPEED:</b>	4000 fpm (20 m/sec) (Rotary / Centrifugal)
<b>PRESSURE:</b>	300 psi (20 Bar)
<b>CONSTRUCTION:</b>	LATTICE BRAID®